

INTRODUCING MODEL CVC


FIBERGLASS UPBLAST CENTRIFUGAL FAN

ABOUT CFT

COMPOSITE FAN TECHNOLOGY MANUFACTURES A COMPLETE LINE OF FIBERGLASS FANS. CFT FANS ARE DESIGNED TO ACHIEVE MAXIMUM CORROSION RESISTANCE WHILE OFFERING RUGGED CONSTRUCTION, EASE OF MAINTENANCE AND EFFICIENT OPERATION.

STANDARD FEATURES:

- 5 SIZES AVAILABLE (10" TO 24")
- CAPACITIES UP TO 15,000 CFM
- PRESSURES UP TO 2" W.G.
- SOLID FIBERGLASS HOUSING AND HIGHLY EFFICIENT BACKWARD CURVED IMPELLER CONSTRUCTED OUT OF PREMIUM CORROSION RESISTANT VINYL ESTER RESIN
- ALL RESIN IS FIRE RETARDANT WITH A CLASS I FLAME SPREAD OF 25 OR LESS PER ASTM E-84
- STANDARD HOUSING COLOR IS GRAY
- ALL EXTERIOR SURFACES CONTAIN UV INHIBITOR
- C-GLASS SURFACE VEIL ON AIRSTREAM SURFACES
- 316 SST SHAFT (BELT DRIVE ONLY) AND HARDWARE
- EPDM DOUBLE LIP SHAFT SEAL
- HEAVY DUTY PILLOW BLOCK BEARINGS (BELT DRIVE ONLY)
- V-BELT DRIVE WITH 1.5 S.F. MINIMUM (BELT DRIVE ONLY)
- TEFC MOTOR (1/3 HP MINIMUM)

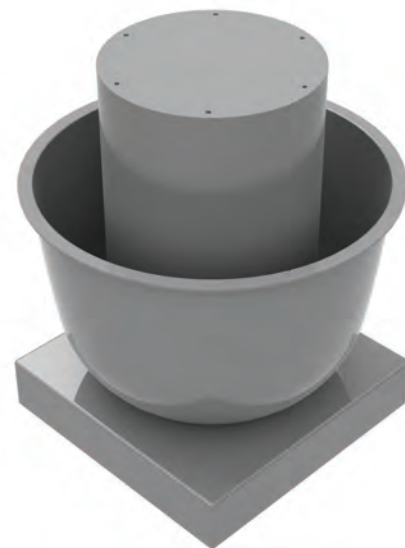

- FIBERGLASS CURB CAP OR FIBERGLASS WALL SLEEVE

OPTIONAL ACCESSORIES

STATIC GROUNDING OF AIRSTREAM, ROOF CURB, DAMPERS, DISCONNECT SWITCHES, INLET/OUTLET GUARDS, EXOTIC SHAFT MATERIAL AND/OR HARDWARE AVAILABLE, CUSTOM COLORS, SYNTHETIC SURFACE VEIL, AND CUSTOM RESIN FORMULATIONS ARE AVAILABLE.

